

BG-12100


12V 100Ah

LiFePO4

Lithium Iron Phosphate
Deep Cycle Battery




Physical Dimension-mm

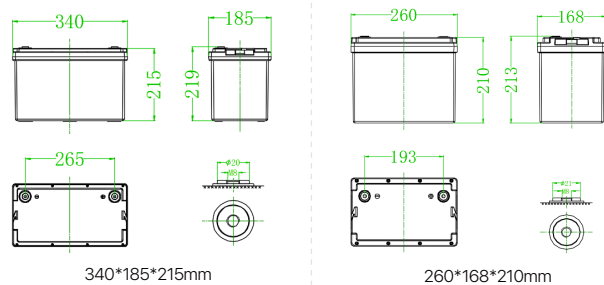

Specification			
Nominal Voltage	12.8V	Max. Continuous Discharge Current	100A
Nominal Capacity	100Ah / 1280Wh	Peak Discharge Current	450A±160A (0.5-1.5S)
BMS	Bluetooth with Smartphone App	Discharge Cut-off Voltage	10V±0.5V
Cycle Life	>4000 cycles @0.5C / 80%DOD	Charge Temperature	0°C~55°C @60±25% Relative Humidity
Months Self Discharge	<3%	Discharge Temperature	-20°C~60°C @60±25% Relative Humidity
Eciency of Charge	100% @0.5C	Storage Temperature	-20°C~45°C @60±25% Relative Humidity
Eciency of Discharg	96~99% @0.5C	Protection Class	IP65
Charge Voltage	14.2~14.6V	Approx. Dimensions	340*185*215mm / 260*168*210mm
Charge Mode	0.2C to 14.6V, then change to 0.02C (CC/CV)	Approx. Weight	12kg
Recommended Charge Current	100A	Terminal	M8
Max. Charge Current	100A	Maximum Modules in SParallel	4S4P
Charge Cut-off Voltage	14.6V±0.2V	Monitoring Option	Heating and Active equalization

12V100AH

BG-12100

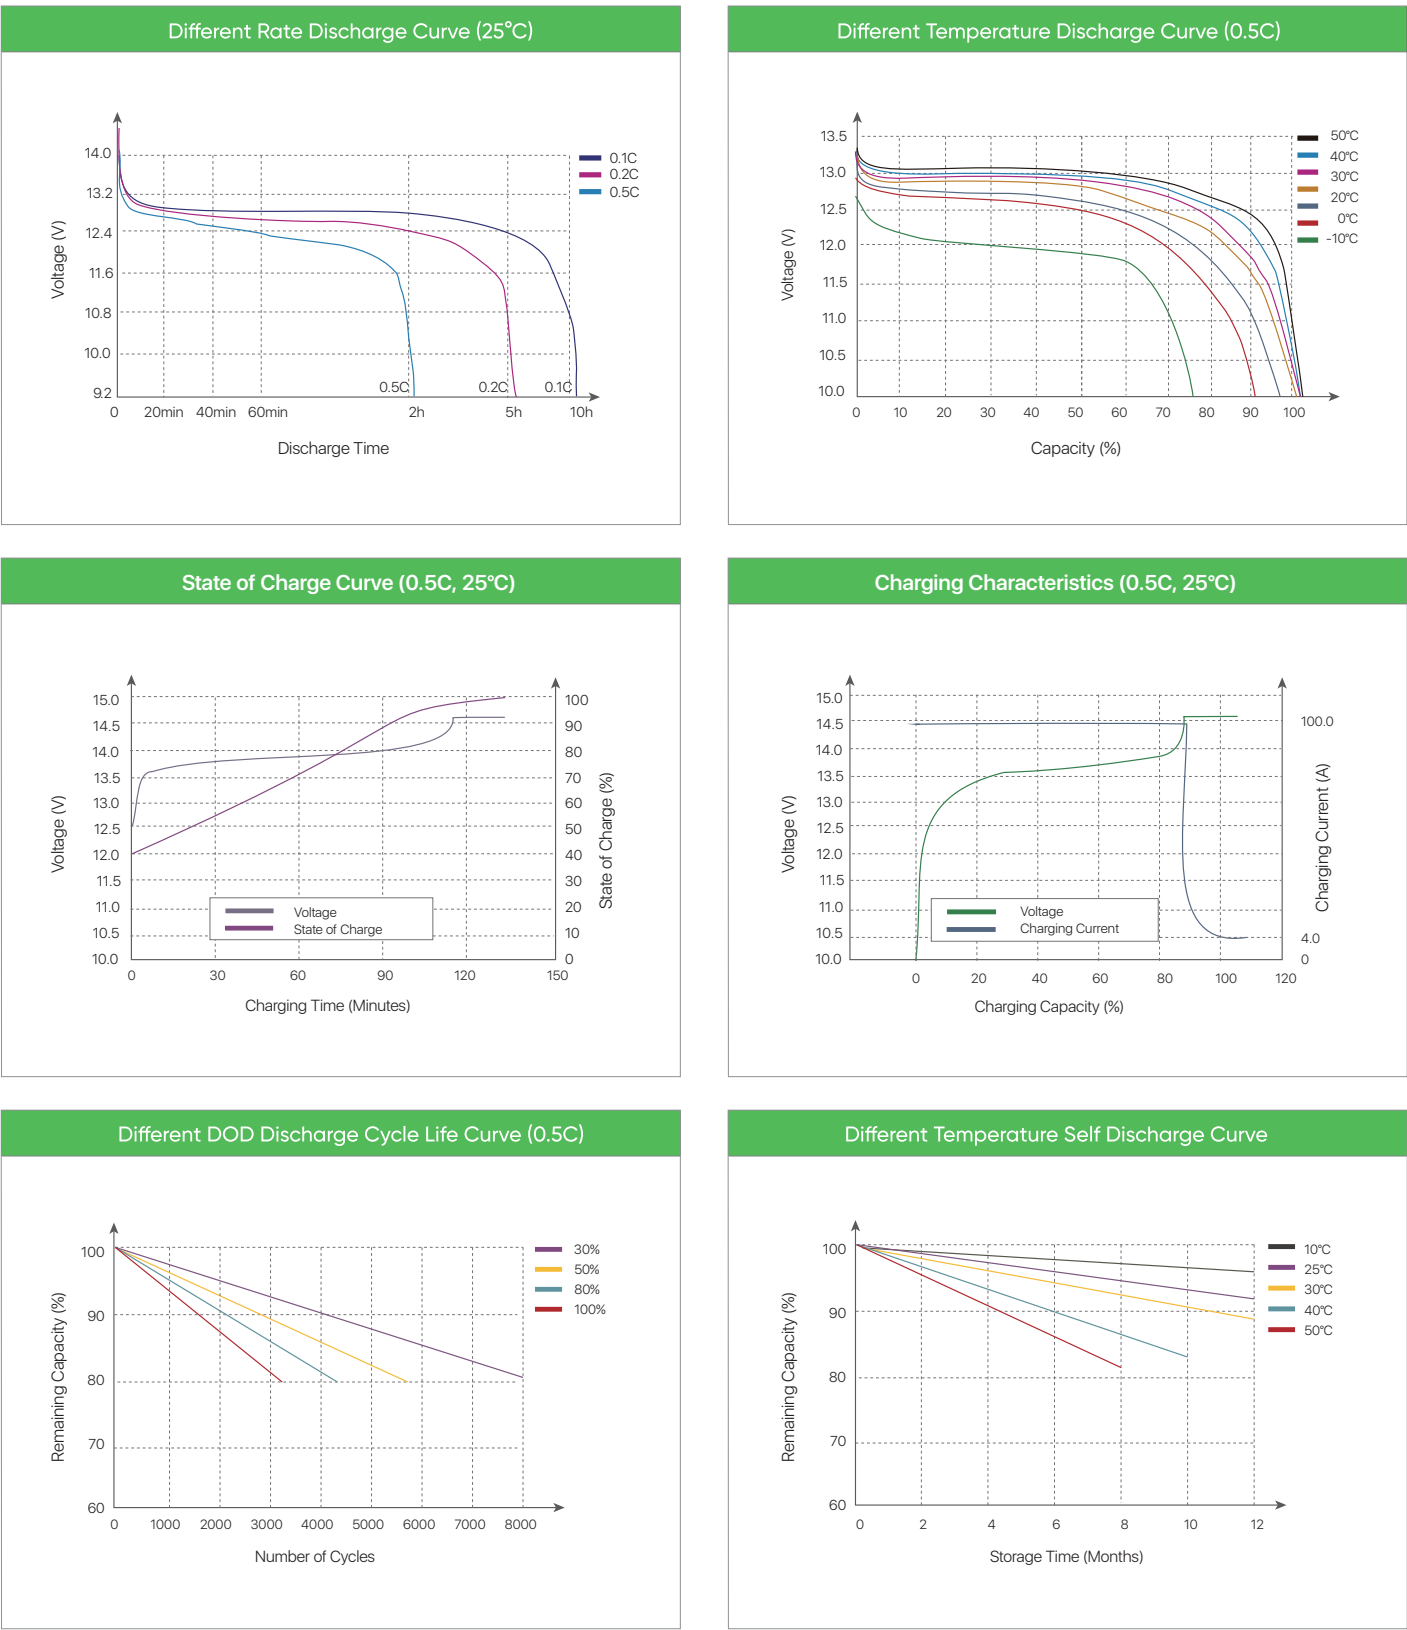

(Note) All above information shall be changed without prior notice, Basen reserves the right to explain and update the latest information.